



Installation Guide

JBus

Table of Contents

OVERVIEW _____	1
WHAT'S IN THE BOX? _____	1
REVISION HISTORY _____	1
INSTALLATION-JBUS _____	1
SETUP- AZUGA FLEET TRACKING _____	4


Overview

We appreciate your interest in choosing Azuga as your fleet tracking partner. This document provides instructions for a new user on

- How to install JBus into your vehicle.
- How to set up the device in the Azuga fleet applications.

Before installation, kindly note the device serial number (Printed on the device). You will need this information at a later time to set up your device in the Azuga App.

What's in the box?

JBus device	 <p>JBus device is shipped with the standard cables attached.</p>
-------------	---

Revision History

Date	Revision	Comment
December 2021	Version 1	Initial Version
February 2023	Version 2	JBus connection pictorial representation is introduced

Installation-JBus

Based on the type of port, a JBus device can be installed through any of the following

1. 16 Pin Port
2. 6 Pin/9Pin Port

16 Pin Port:

Locate the Vehicle's diagnostic port, typically it can be found below the steering wheel. Follow the below steps to install JBus

Fig:1 JBus 16 Pin Port



Fig:2 JBus 16 Pin Port covered



1. Switch off the vehicle or the unit on which the installation is performed.
2. Plugin the Azuga device into the diagnostic Port (Fig:1).
3. If the port is covered by a panel/door(Fig:2), use the extension cable to install the device. Ensure the device is not protruding from the panel.

Important: To get additional accessories like an extension cable reach out to customercare@azuga.com

4. Setup is initialized and power is received once the LEDs on the Azuga device start flashing.
5. Ensure the Green LED lasts for 5 seconds, which indicates the device is ready to use.

Note: If the Red LED blinks, the installation is failed, remove the device and repeat the same steps.
If the problem persists kindly reach out to customercare@azuga.com

6/9 Pin Port

1. Plug the cable to the vehicle diagnostic port as shown below.
2. Plug the device into the other end of the cable.



3. Ensure the Green LED on the Azuga device lasts for 5 seconds, which indicates the device is ready to use.

Note: If the Red LED blinks, the installation is failed, remove the device and repeat the same steps.


If the problem persists kindly reach out to customer@azuga.com

6/9 Pin Port- Occupied

If the vehicle diagnostic port is occupied already, use the Y-cable to install the Azuga device.

Note: For additional accessories like a Y cable, reach out to customer@azuga.com

1. Plug in the female end of the Y-cable into the diagnostic Port.
2. Connect the Azuga device to another end of the Y cable.

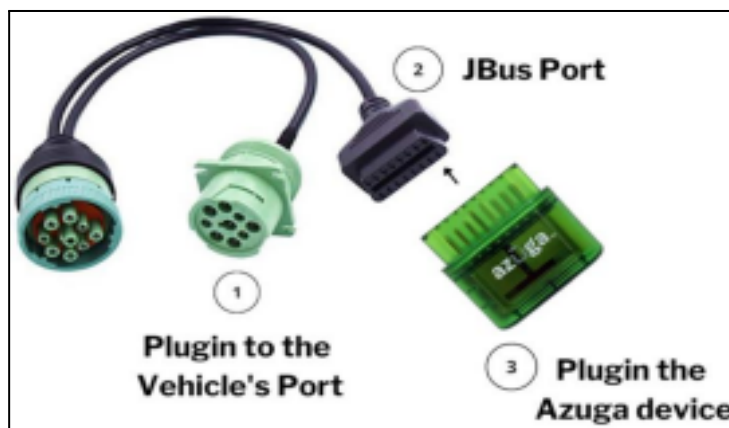

3. Ensure the Green LED on the Azuga device lasts for 5 seconds, which indicates the device is ready to use.

Note: If the Red LED blinks, the installation is failed, remove the device and repeat the same steps.
If the problem persists kindly reach out to customercare@azuga.com

Setup- Azuga Fleet Tracking

The installed JBus device needs to be set up for fleet tracking. Below are the 2 methods to set up the device

- Setup from Fleet Mobile App
- Setup from Fleet Web App


Important: If Login credentials are not yet received, reach out to customercare@azuga.com
It is recommended to change the password when you log in for the first time. Refer FAQ section in the Azuga web application for more information.

Azuga Fleet Mobile App

1. Login into Azuga Fleet Mobile App and navigate to UTILITIES>>INSTALLATION.

Note: If the Installation feature is not available Kindly reach out to customercare@azuga.com

2. Tap Installation and Select the JBus Plug'n'Play option.

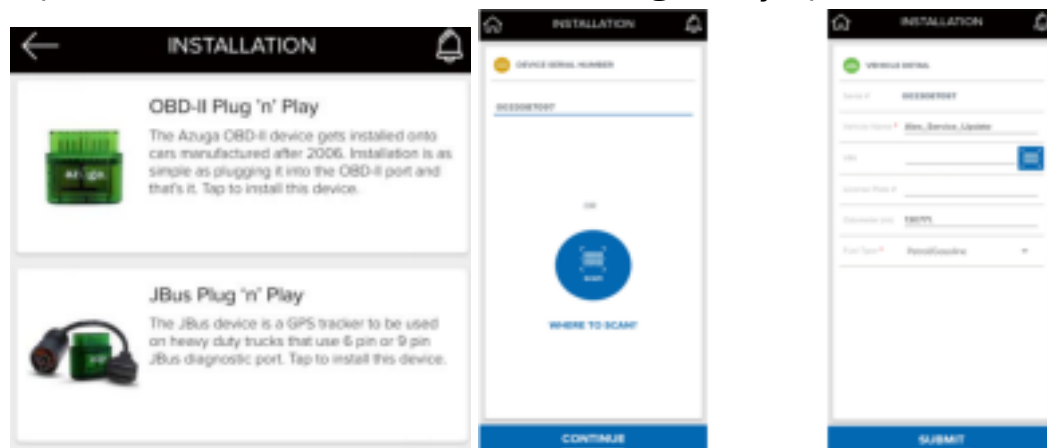


3. Device serial can be fed by any of the following methods
 - I. Tap the Where to Scan button and scan the barcode printed on the Azuga device.
 - II. Type the serial number manually.
4. Click the Continue button, verify the details shown and Click Submit.





Azuga Fleet Web

1. Open **Azuga Fleet Web Login** and enter your Login Credentials.
2. Devices and vehicles are already created in the portal by Azuga. Vehicle names and device serial numbers are the same by default.

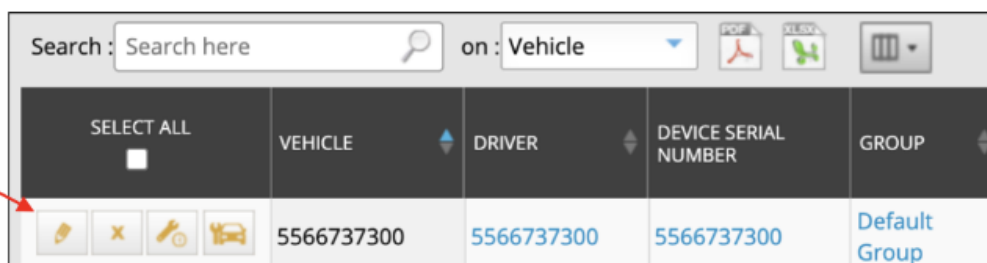
Note: Vehicles(created by default) can be renamed as per your requirements.

3. Click the ADMIN tab and select Vehicles.
4. Click the Pencil icon to edit/add/remove the details for the selected vehicle.



SELECT ALL	VEHICLE	DRIVER	DEVICE SERIAL NUMBER	GROUP
   	5566737300	5566737300	5566737300	Default Group

5. Fill in the mandatory(*) fields and click the Update Vehicle button.

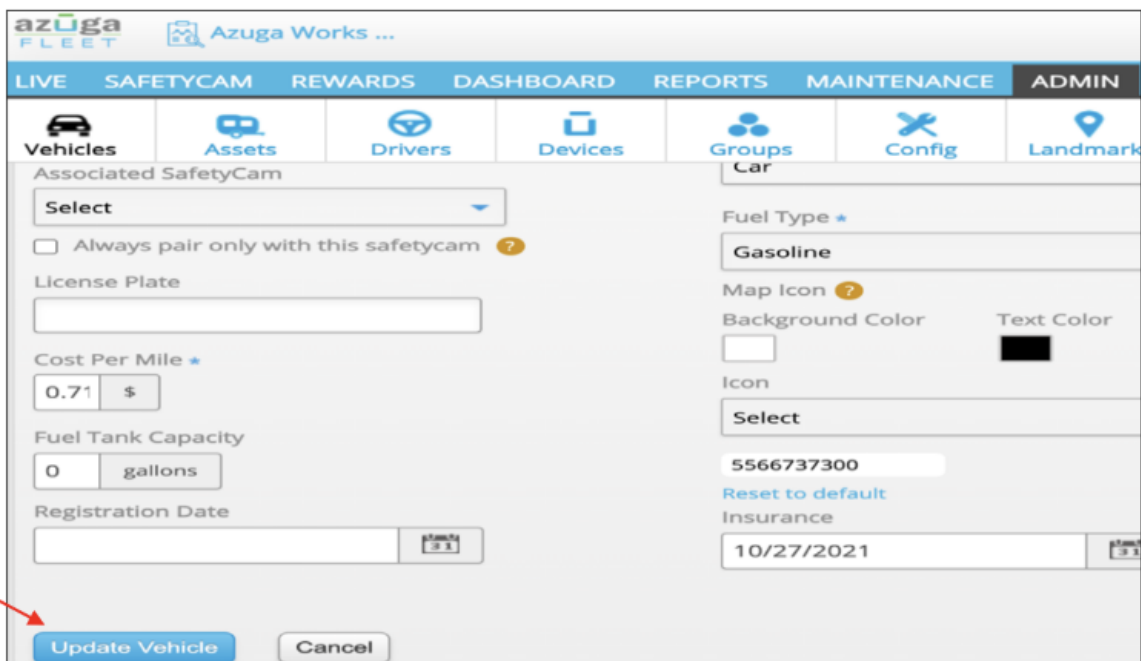

azuga FLEET Azuga Works ...

LIVE SAFETYCAM REWARDS DASHBOARD REPORTS MAINTENANCE ADMIN

Vehicles Assets Drivers Devices Groups Config Landmark

Associated SafetyCam

Select

☐ Always pair only with this safetycam ?

License Plate

Cost Per Mile *

0.71 \$

Fuel Tank Capacity

0 gallons

Registration Date

10/27/2021

Fuel Type *

Gasoline

Map Icon ?

Background Color

Text Color

Icon

Select

5566737300

Reset to default

Insurance

10/27/2021

Update Vehicle Cancel

Note: Repeat the steps for the remaining vehicles and ensure the vehicle names are unique.
Reach out to customercare@azuga.com for additional support.